
DRAIN DETAIL - PVC COATED ALUMINUM DECK DRAIN

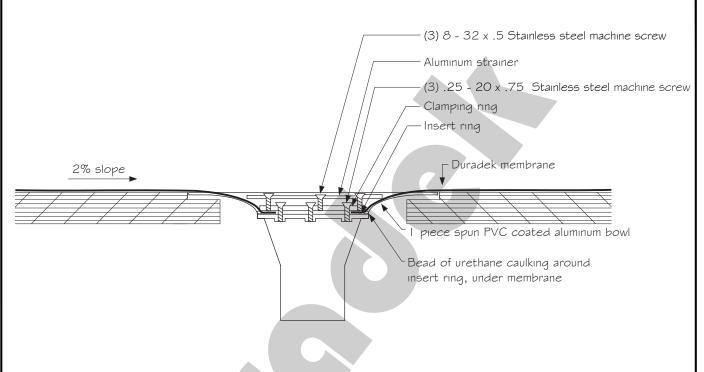

Installation Notes:

- Drain to be countersunk into plywood deck approximately 1/8".
- Drain body is attached to plywood with 6 x #8 x 1 $\frac{1}{2}$ " screws (or roofing nails). Countersink screw heads with $\frac{3}{8}$ " high speed countersink drill bit (nic). File off burrs (on back side) created from drilling process.
- Attach drain body to drain pipe with "M-J" coupling (nic). Coupling available in stepped sizes for attachment to both larger and smaller diameter drain pipes (By others).
- Remove strainer and clamping ring before laying in vinyl.
- Apply bead of urethane caulking at edge of insert ring.
- Install clamping ring with (3) screws supplied. Wipe off excess caulking if necessary.
- Install drain cover with (3) screws supplied.

NOTE:

AS A SUPPLIER OF FINISHED PRODUCT ONLY, DURADEK DOES NOT ASSUME RESPONSIBILITY FOR ERRORS IN DESIGN, ENGINEERING, OR DIMENSIONS. THE ARCHITECT, ENGINEER, SPECIFIER, CONTRACTOR OR OWNERS' REPRESENTATIVE MUST VERIFY ALL DIMENSIONS, SIZES, AND SUITABILITY OF DETAILS, AND ARE IN ACCORDANCE WITH GOVERNING BUILDING CODES.


DURADEK LTD.


CANADA UNITED STATES Bus: (604) 591-5594 Bus: (816) 421-5830 Fax: (604) 591-3100 Fax: (816) 421-2924


SYSTEM:
ALL ASSEMBLIES

DATE: 22/05/19
REV. DATE. 25/04/22


DR-02 - Alt A

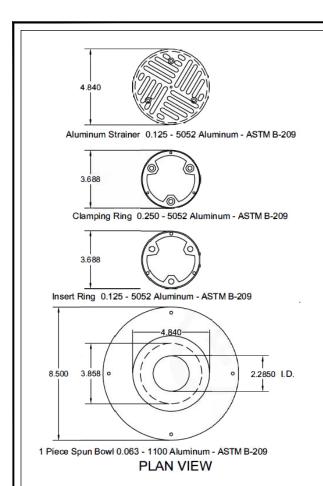







SIZING CHART			
DRAIN SIZE	CODE	STEM OD	
2"	JVDD2	2.40"	
2" PVC COATED	JVDD2C	2.40"	

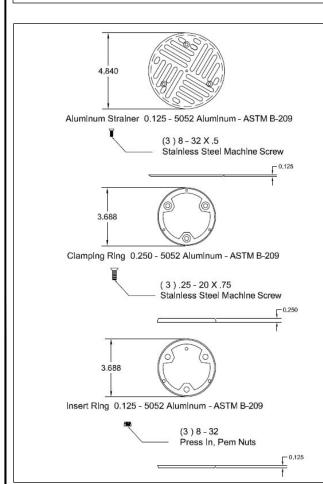





1 Piece Spun Bowl 0.063 - 1100 Aluminum - ASTM B-209 PLAN VIEW

SIZING CHART		
DRAIN SIZE	CODE	STEM OD
3"	JVDD3	3.40"
3" PVC COATED	JVDD3C	3.40"