
CONCRETE DRAIN WITH SURFACE MEMBRANE CLAMP

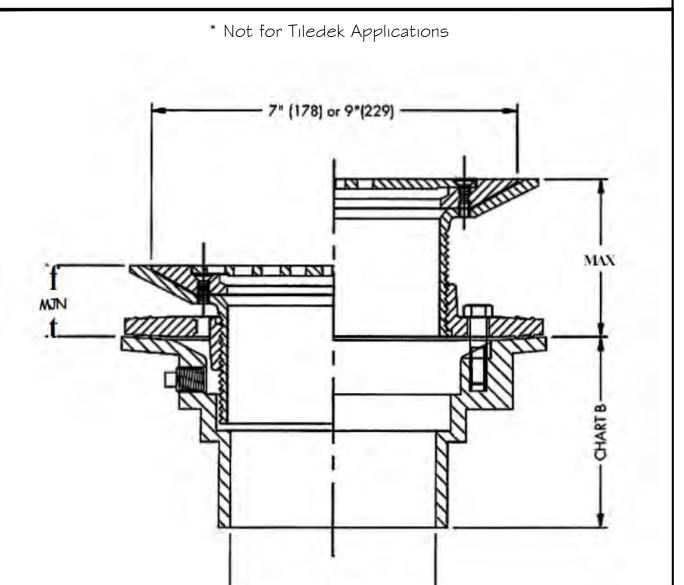

Note: Membrane clamped and caulked between strainer and body extension. We recommend the use of Watts FD-IOO-FC floor drain with surface membrane clamp for concrete deck applications.

PIPE SIZE

For more information see Techtalk 165, or visit the manufacturer's website: http://media3.wattswater.com/ES-WD-FD-100-FC.pdf

NOTE:

AS A SUPPLIER OF FINISHED PRODUCT ONLY, DURADEK LTD. DOES NOT ASSUME RESPONSIBILITY FOR ERRORS IN DESIGN, ENGINEERING, OR DIMENSIONS. THE ARCHITECT, ENGINEER, SPECIFIER, CONTRACTOR OR OWNERS' REPRESENTATIVE MUST VERIFY ALL DIMENSIONS, SIZES & SUITABILITY OF DETAILS.

CANADA	Bus: (604) 591-5594
UNITED STATES	Bus: (816) 421-5830

s: (604) 591-5594 Fax: (604) 591-3100 s: (816) 421-5830 Fax: (816) 421-2924

SYSTEM:	DATE:	17/04/18	
DURADEK ULTRA	REV. DATE:		DR-05