



EIFS - WITH RAISED TRIM

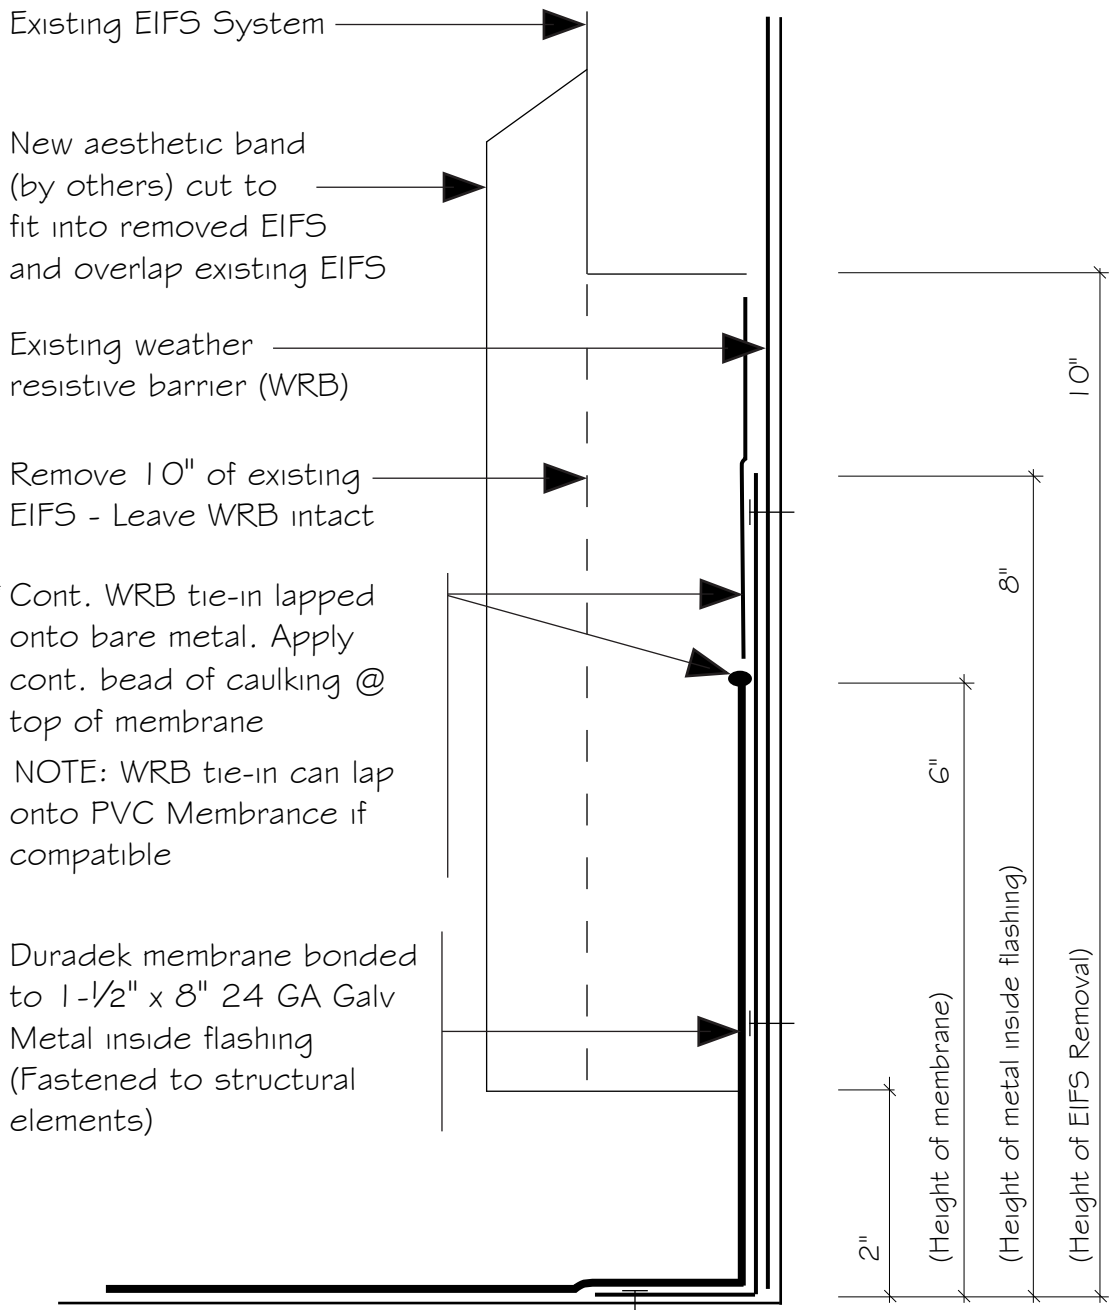

* Cont. WRB tie-in lapped onto bare metal. Apply cont. bead of caulking @ top of membrane
 NOTE: WRB tie-in can lap onto PVC Membrane if compatible

Duradek membrane bonded to 1-1/2" x 8" 24 GA Galv Metal inside flashing (Fastened to structural elements)

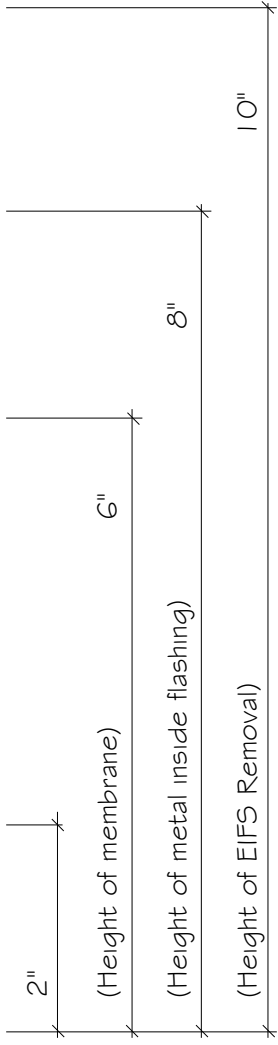

(Note: All dimensions are minimum)

*WRB is non-removable, hence the need for flashing as a separation barrier.

NOTE: AS A SUPPLIER OF FINISHED PRODUCT ONLY, DURADEK DOES NOT ASSUME RESPONSIBILITY FOR ERRORS IN DESIGN, ENGINEERING, OR DIMENSIONS. THE ARCHITECT, ENGINEER, SPECIFIER, CONTRACTOR OR OWNERS' REPRESENTATIVE MUST VERIFY ALL DIMENSIONS, SIZES, AND SUITABILITY OF DETAILS, AND ARE IN ACCORDANCE WITH GOVERNING BUILDING CODES.

DURADEK LTD. CANADA Bus: (604) 591-5594 Fax: (604) 591-3100
 UNITED STATES Bus: (816) 421-5830 Fax: (816) 421-2924

SYSTEM: ALL ASSEMBLIES	DATE: 04/03/19 REV. DATE: 15/12/20	DRAWING No.: IS-11
---------------------------	---------------------------------------	-----------------------