

CAROLINAS Roofing

September . October 2011
Vol. 2 / Issue 5

YOUR GUIDE TO ROOFING IN THE CAROLINAS



spotlight:
GOVERNMENT BUILDINGS

technical point:
DoD TESTS INTEGRATED METAL ROOF

business sense:
QR CODES

HOUSE TOPS:
REROOFING A HISTORIC HOME

ATLAS
PRISTINE SHINGLES



Algae Resistant Roofing System
NEW PRODUCT
www.ATLASROOFING.com



Walkable and Waterproof

PVC Membranes
Create Usable Spaces
on Flat Roof Decks

WRITTEN BY **JOHN OGILVIE** | Whether it is a restaurant's rooftop patio or a townhouse complex's series of open-air terraces, a dearth of usable space means many urban projects are claiming their roof systems as pedestrian areas. Unfortunately, roofing products are rarely intended for this sort of traffic. Protective carpeting or treated wood can be placed over an assembly, but these materials are still susceptible to damage from the elements. Similarly, applied coatings and fiberglass have been used with limited success because of the inherent deficiencies in the materials themselves. ¶ For multi-unit residential buildings and light commercial projects, walkable decks finished with heavy-duty polyvinylchloride (PVC) thermoplastic waterproofing membranes have been used successfully in Canada for several decades and are now growing in popularity in the U.S. However, these systems are not without their limitations, and roofing professionals must understand the installation considerations.

PROBLEMS WITH DECK WATERPROOFING

Often built with a wood or concrete substrate, pedestrian roof decks can be waterproofed using various systems. In protected assemblies, the waterproofed membranes are shielded from the elements by another surface, such as concrete pavers, tiles or wood deck boards. However, these traditional methods can result in numerous problems, ranging from deterioration to delamination, that require costly maintenance and expensive repairs.

In exposed assemblies, the waterproof membrane—either a liquid-applied coating or a PVC product—is left open to the elements. However, since concrete substrates tend to shift in response to daily temperature fluctuations, the use of epoxy, urethane and acrylic coatings can be challenging. Constant movement can put enormous stress on these waterproofing



THE PROCESS OF SEAMING TWO SHEETS OF PVC MEMBRANE TOGETHER IS THE MOST CRITICAL ELEMENT OF A PVC SYSTEM.

products, resulting in pinholes, blisters or surface cracks that allow moisture to penetrate the membrane and cause further deterioration.

PVC isn't problem-free either. Although normal pedestrian traffic should not damage the vinyl, removing snow, moving equipment or sharp impact can cause mechanical damage; extreme UV ray exposure can fade or 'chalk' the membrane; and abrasion can scuff the printed pattern.

To combat these issues, roof-grade PVC decking membranes should withstand the same rigorous material standards testing as thermoplastic single-ply roof coverings. In high traffic zones, solid-colored products are recommended to minimize issues of scuffing or abrasion.

VINYL ADVANTAGES

PVC membranes are extremely durable—even when exposed to heavy

When Strength Counts

Triceratops Slate Cutter

There is no other slate cutter like it!

- ✓ Saves Slate and Time
- ✓ Cuts ANY Shape Easily
- ✓ Cuts 3/4" thick Slate
- ✓ Natural Bevel Edge Cut
- ✓ Cuts Convex & Concave Curves
- ✓ Its SAFE

Cordless, Tabletop and Handheld Electric Slate Cutters

View our video online.

AGZ INDUSTRIES, INC.
SPECIALTY TOOL MFG & SUPPLY

NA Böcker

302 West Lane St. - Raleigh, NC 27605 - 919.832.8481
800-264-8076 / 888-BOCKER 1 - www.nabocker.com

follow us on

Pteradactyl

traffic and severe weather conditions, they do not peel, chip, delaminate or crack. The product offers varying degrees of slip resistance as required for the particular project. Walkable PVC membranes are designed and tested to offer a static coefficient of friction (or slip resistance).

- Dry conditions: equal to or greater than 0.5 for leather and equal to greater than 0.7 for rubber.
- Wet conditions: equal to or greater than 0.6 for leather and equal to or greater than 0.65 for rubber.

Because it is pre-manufactured, the material can be fabric-reinforced to provide additional stability and multi-directional strength. Walkable PVC roof membranes can cost up to 50 percent less than conventional membranes installed with a protective overlay. They also feature benefits in terms of easy installation and low maintenance.

Rougher membranes can require washing with a scrub brush and mild detergent or pressure washing. Regular inspection of caulking and immediate attention to any loose seaming help ensure the PVC membrane lasts for years to come.

A properly specified PVC membrane should incorporate mildew inhibitors, be fire-retardant and resistant to chemicals, and meet all building-code standards. It should also have UV ray and heat stabilizers to resist the potential of vinyl cracking, embrittlement and discoloration.

Although waterproofing is the most significant attribute of a PVC membrane, appearance is also important. Vinyl products come in a wide variety of patterns, colors and textures geared to diverse needs and budgets that can create complementary or contrasting borders.

DEFLECTION CONSIDERATIONS

The deck's ability to control surface water is affected by several factors, including slope, drip edges and diverters. For the best performance, the structure should be sloped to eliminate ponding water while accounting for building shrinkage or settlement. When the deck is designed with the correct slope, water should flow away from the building into a gutter system or over a drip edge away from the exterior wall system.

On new construction, wood-frame buildings can shrink as much as 1/2 inch per floor, which can result in the balcony sloping in the wrong direction—a situation that can have adverse consequences for controlling surface water.

Furthermore, building settling can make things worse if enough slope has



not been built in. Nevertheless, given the proper grade—approximately 2 percent—a simple drip-edge detail is usually the most expedient way of removing surface water from the deck surface. (False fascia detailing can be used to hide the gutter, fascia, railing mounts and deck slope.) Severe structural damage can occur when the waterproofing detail is incorrect. To address this situation, simple premanufactured diverters can be installed and waterproofed to steer water away from adjoining walls and other critical junctions.

DEALING WITH DRAINAGE

Drainage is dependent on flashing, the proper sequencing of moisture barriers and the detailing of wall openings. Special attention to flashing is important because incorrect detailing of these elements invariably leads to leaks and water damage. For example, curbs or knee walls higher than 3 inches or higher than a wall opening result in a “trapped” deck system that needs special drainage.

Should a trapped deck occur, the top plate of the curb or knee wall must slope back toward the deck surface. The PVC membrane should also extend to the line of the outside drip edge, which, in turn, should extend well beyond the building wall surface.

Proper sequencing of moisture barriers is critical, and installing the PVC membrane after the wall assembly has been completed almost always leads to failure. In the first step, the vinyl is installed on the floor



THE VINYL SHEETS SHOULD BE OVERLAPPED AND HEAT FUSED WITH THE MEMBRANE AFFIXED TO THE SUBSTRATE WITH AS FEW SEAMS AS POSSIBLE.

and extended up the wall at least 6 inches with the actual height dictated by the local building code.

Vertical surfaces are then covered by a building paper (or other wall moisture barrier) that overlaps the vinyl by at least 2 inches. Horizontal surfaces, including the top of stub walls or solid railings, should be covered with a peel-and-stick membrane with special attention paid to the “saddle” where they meet vertical surfaces.

Many decks have posts and columns that need proper construction and sequencing of moisture barriers to prevent water from seeping under the PVC. Water may find an entry point in the post itself and get in behind the waterproof membrane.

Because wood posts or columns can crack and allow water to get into the subsurface, they should be covered with a moisture barrier and then finished with siding. Where the aesthetic effect of a rough-hewn wood post is required, special consideration must be made for post attachment.

Curbs, knee walls, posts and wall openings must be built and detailed to ensure membrane performance. In constructing or modifying door openings, door sills should be sloped toward the deck surface for optimum drainage, and the waterproof membrane should continue into the rough door opening saddle to deflect any moisture.

Building authorities can require overflow drains or scupper boxes on trapped decks to provide a path for water to drain from the deck. Drains and scuppers should be sloped toward the outside, and scuppers should be inserted into the deck surface to prevent ponding. Scuppers are generally quite difficult to detail in such a way that makes them impervious to wind, rain, snow and structural deflection.

Drains should be approved roof products—ABS shower drains are only acceptable for showers and are unsuitable for any roof deck or multi-unit residential building application. PVC-coated drains or drains with a positive clamping system are suitable to allow water to drain into the building’s storm-water system. With PVC-coated overflow devices, the decking membrane can be welded directly to the PVC-coated surface without caulking.

DRYING AND DURABILITY

Drying can be aided by the use of a rainscreen wall assembly or the venting of trapped air spaces. To reduce moisture buildup, venting of the space underneath decks, balconies and walkways with a closed soffit or ceiling is especially important. (To be effective, the vent area should

have a 1:150 ratio to the insulated ceiling area.) If equal venting cannot be provided at both ends of the joist runs, then purlins should be installed above the joists to allow for cross-ventilation. Some manufacturers also offer snorkel-like ventilation systems (with mesh bug screens) that allow for venting of the roof space joists in new and retrofit construction.

While drying helps prevent mildew, mold and rot, the roofing components must also be tough enough to stand up to foot traffic, chemicals and other environmental conditions. The assembly’s durability is affected by the quality of the waterproofing membrane and its overall maintenance. Although two membranes can have a similar appearance, the quality of their ingredients can give the products a price differential of up to 25 percent and a difference in life expectancy of as much as 75 percent.


Walkable PVC roof deck membranes have to go through the same rigorous product material standards and fire test of roof coverings as thinner thermoplastic single-ply roofing membranes, including:

- ASTM International D 4434, “Standard Specification for Polyvinyl Chloride Sheet Roofing”
- ASTM E 108, “Standard Test Methods for Fire Tests of Roof Coverings,” or Canadian General Standards Board 37.54-95, “Polyvinyl Chloride Roofing and Waterproofing Membrane”

When evaluating a thermoplastic roofing option that will face light pedestrian traffic, it should be subjected to additional abrasion and slip-resistance testing. Any alternative material, type or method of construction can be accepted as long as it demonstrates compliance with the performance features of the applicable code. In the U.S., the International Code Council Evaluation Service evaluates membranes in accordance with AC 39, “Acceptance Criteria for Walking Decks.” Roof and walking deck membranes can be listed by ICC as 07 18 00: Traffic Coatings or 07 54 00: Thermoplastic Membrane Roofing.

Waterproofing membrane products also must be manufactured under an approved quality-control program with visits by an inspection agency under the International Accreditation Service. It is also important to ensure the compatibility of the waterproofing system’s components—membrane, tapes, sealants, adhesives, drains, scupper boxes, flashings and perimeter fastening devices.

With proper care and cleaning, waterproof PVC membranes can be expected to last for 10 to 15 years or more. De-mountable flashing systems are one way to reduce the deconstruction required when

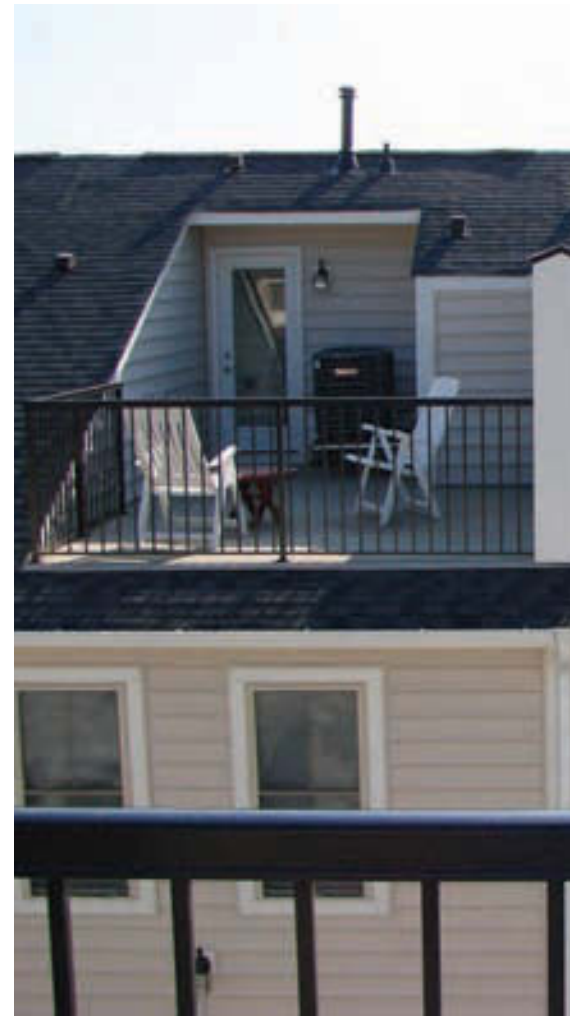

a building owner must eventually repair or replace a membrane. These systems are easy to remove and allow the PVC to be repaired or replaced quickly and easily with minimum destruction.

Membrane and trim panels can be replaced without disrupting the existing wall system and doors, meaning a building owner would not need to remove the siding or stucco or compromise the second waterproofing job.

PRE-INSTALLATION DECISIONS

For best results, installation and seaming plans showing joints, termination details and material interfaces should be prepared, along with two labeled samples (8 1/2 by 11 inches) of the specified PVC membrane illustrating finish, pattern, color and backing. At least one week before installation, a pre-installation meeting should be held involving the client’s representative, manufacturer’s represen-

tative, contractor and installer to discuss pedestrian deck waterproofing practices and any precautions applicable to the specific project.

When it comes to the actual PVC product used for the roof deck system, there are several factors to keep in mind: It is important to specify a polyester reinforced PVC membrane with UV resistance for fully adhered installation with heat-welded seams and perimeter attachment. A roofing designer must always specify overall sheet thickness, as well as width and color.

With the exception of cap flashings (which are typically manufactured and installed by other parties), all perimeter fasteners and PVC-coated metal scuppers, overflow drains, roof drains and trim should be provided by the membrane manufacturer. Whenever possible, the color of the perimeter fasteners should be coordinated with the membrane.

Prior to installation, an examination should be conducted to verify the existing deck is secure and solid in accordance with local code's structural requirements. The surface must be clean and smooth; free of depressions, waves and projections; and properly sloped to drains, valleys and eaves. Any joints, voids or low areas of a wood deck should be filled and sanded smooth.

Any surface imperfections or variations on a concrete deck should be filled with leveling compound and the surface cleaned of any contaminants.

SYSTEM INSTALLATION

I recommend walking membranes be adhered directly to the structural deck—concrete or plywood. In wood-frame construction, this can be achieved under typical “cold roof” design with the batt insulation installed between the roof joists. In concrete's case, when the insulation is applied atop the slab, I recommend the plywood substrate be fastened to wood blocking/sleeper/purlins. The concern is when the insulation is sandwiched between the plywood layer and the structural deck, it could compress (even in the case of high-density expanded polystyrene [EPS]), allowing the fastener to ride up and create a “nail pop.”

Before the product hits the deck, there needs to be a thorough examination of the space to be covered. Sanded plywood or cement board provides the best finished surface possible. For the flattest face, it is recommended to use minimum 0.63-inch-thick and preferably 0.75-inch-thick plywood; anything thinner can warp because of the material's absorption of moisture from the atmosphere. The deck

must also be secure, well supported, clean, smooth and properly sloped to drains, valleys or eaves. PVC deck membranes should not be applied directly to treated structural deck panels. Additives used in the various factory-applied treatments have caused “backup” staining in the past. When pressure-treated plywood is required for deck construction, I recommend an overlay with the aforementioned recommended plywood.


Surfaces and site conditions should be ready to receive the PVC membrane and conform to the membrane manufacturer's requirements and local building-code standards. If problems are seen, the installation consultant must be notified with further inspection necessary in cases where a waterproof PVC membrane is being installed over an existing system. The deck must be thoroughly inspected for rot, weakness/delamination of plywood, loose panels or spalling concrete hidden under the existing waterproofing membrane.

The surface must then be prepared. For wood decks, this means filling in joints, knot holes, voids and low areas with filler and sanding until a smooth surface is achieved. For a Class A fire-rated application, a plywood deck should be covered with a cementitious board that meets all requirements. For concrete decks, surface imperfections and variations must be filled with leveling compounds. It is also important to test for—and remove—surface contamination.

Waterproof PVC membranes should not be installed when temperatures are below 25 F or above 98 F or when winds are more than 30 mph. To ensure adequate adhesion, installers should glue a small test patch of the PVC membrane (about 2 square feet) to the existing surface. After 24 hours, the adhesion should be checked. If there are any concerns about the membrane's ability to bond to the existing surface, the coating must be removed and the deck resurfaced with a suitable underlay.

The process of seaming two sheets of PVC membrane together is the most critical element of a PVC system. The vinyl sheets should be overlapped and heat-fused with the membrane affixed to the substrate with as few seams as possible. However, all seams should be extremely strong and visible. Offering invisible butt seams, as has been done in the past, compromises the waterproofing.

To allow for a strong, hot-air-welded seam, adjacent membranes should overlap by a minimum of 3/4 inch. It is important to remember proper fusing cannot take place when the back of the overlapping piece of PVC has been glued. Seam strength and integrity should be checked every few feet; if the seam comes apart, the welding is incomplete and must be redone.

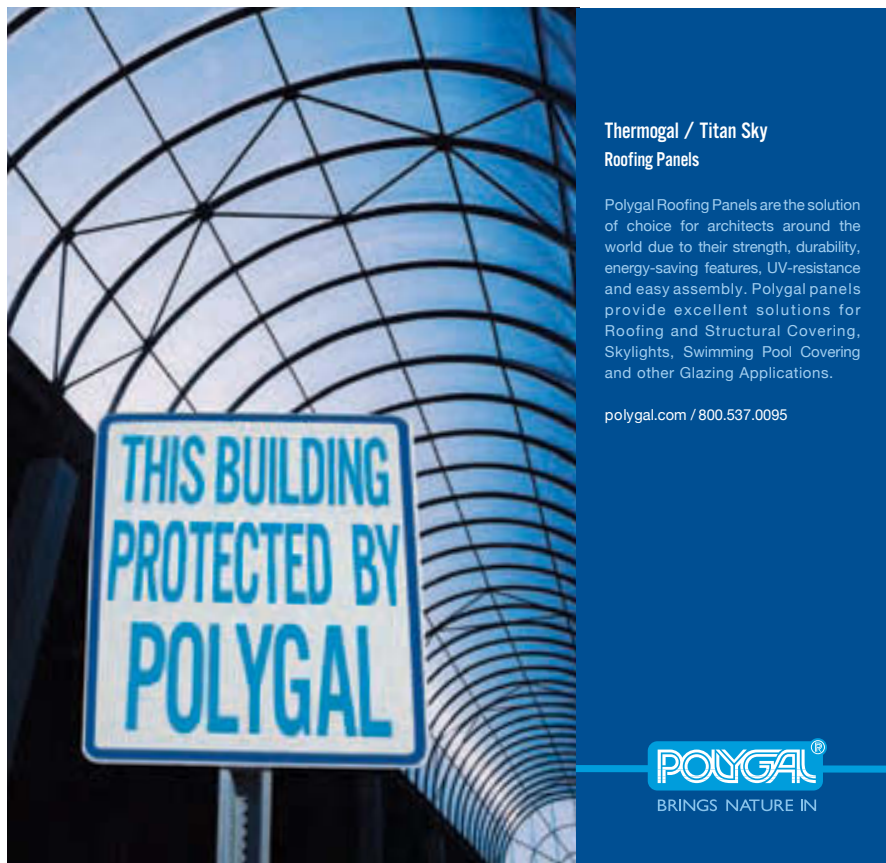

**Thermogal / Titan Sky
Roofing Panels**

Polygal Roofing Panels are the solution of choice for architects around the world due to their strength, durability, energy-saving features, UV-resistance and easy assembly. Polygal panels provide excellent solutions for Roofing and Structural Covering, Skylights, Swimming Pool Covering and other Glazing Applications.

polygal.com / 800.537.0095

POLYGAL®
BRINGS NATURE IN



AT LEAST ONE WEEK BEFORE INSTALLATION, A PRE-INSTALLATION MEETING SHOULD BE HELD INVOLVING THE CLIENT'S REPRESENTATIVE, MANUFACTURER'S REPRESENTATIVE, CONTRACTOR AND INSTALLER TO DISCUSS PEDESTRIAN DECK WATERPROOFING PRACTICES AND ANY PRECAUTIONS APPLICABLE TO THE SPECIFIC PROJECT.

Extreme care must be used when welding a PVC membrane where the seam runs into a 90-degree corner and vertically up a wall or over an edge. All wall and corner seaming must be carefully inspected for pinholes. A strip of PVC can be welded on top of any critical junctions for added security.

Although building papers do not cause an issue, asphaltic products, like peel-and-stick membranes, must be separated from PVC membranes with metal flashing, asphalt compatible modified thermoplastic membrane or aluminum foil tape. On projects where the deck is to be used as a staging area for other trades, protective panels should be applied over the finished membrane.

PVC AND METAL

For a roof deck installation with PVC and metal elements, the inside back corner and outside front corner of the PVC membrane are folded and welded, rather than cut.

Galvanized flashing with a PVC clip holds the membrane in place, as does a roof-quality drain with clamping ring. Colored metal flashing is also used to hold the PVC membrane in place and prevent it from curling or shrinking.

PVC AND COATED METAL

For a roof deck membrane installation featuring PVC and coated metal elements, the PVC membrane is heat-welded to a PVC-coated flashing that provides a drip edge at the outside perimeter of the deck surface. The membrane is also heat-welded to a PVC-coated scupper box and a PVC-coated overflow drain; both allow drainage, even for trapped or curbed decks.

L-TRIM

In some roof deck membrane installations, a metal L-trim is used to secure the PVC membrane to the outside and inside edges of the deck, balcony or walkway surface



and extended up the wall by a minimum of 6 inches to meet some building codes. To ensure a waterproof installation, the PVC membrane is overlapped by the building paper and exterior finish.

For multi-unit residential buildings and light commercial projects, walkable decks finished with heavy-duty PVC thermoplastic waterproofing membranes allow formerly unused space to become usable. However, roofing professionals must carefully design and install these systems to ensure durability. △

➔ **JOHN OGILVIE** is president and an owner of Duradek US Inc., Kansas City, Mo. He can be reached through www.duradek.com.



ALTHOUGH TWO MEMBRANES CAN HAVE A SIMILAR APPEARANCE, THE QUALITY OF THEIR INGREDIENTS CAN GIVE THE PRODUCTS A PRICE DIFFERENTIAL OF UP TO 25 PERCENT AND A DIFFERENCE IN LIFE EXPECTANCY OF AS MUCH AS 75 PERCENT.

High Wind Areas? Hurricanes? Roof Blowoffs?

THE SOLUTION TO WIND UPLIFT PROBLEMS

TESTED AND PROVEN
can give up to 300%
INCREASE for wind uplift

WIND BAR™

INTRODUCING...

WINDBAR™ - NEW PATENTED WINDSTOPPER KEEPS THE FLAT OF THE PANEL FROM UPLIFTING


WINDBAR™ - HELPS STANDING SEAM ROOFS MEET THE IBC BUILDING CODE REQUIREMENTS

WINDBAR™ - FACTORY TESTED UNDER ASTM E-1592

WINDBAR™ - NO ROOF PENETRATIONS



Roof panels utilizing the **WINDBAR™** system.

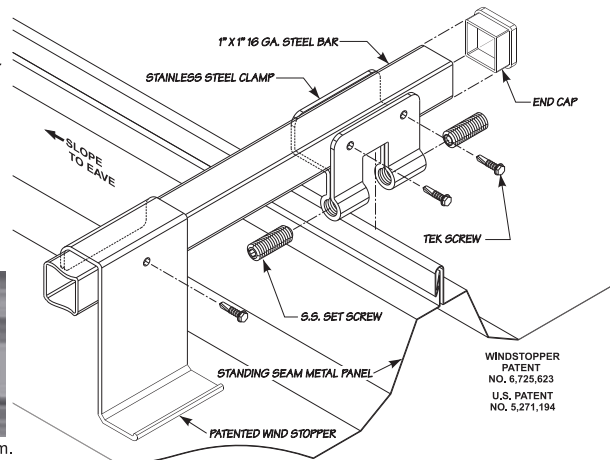

WIND BAR™

CALL (800) 711-9724

VISIT OUR WEBSITE AT: WWW.WINDBAR.COM